

Quick Start Guide

Propane Generator Bottle Exchange




For more assistance: Scan this QR Code for a direct link to the LiveView Packing and Quick Start Guides. You can also visit www.liveviewtech.com/install. If you need additional help, call LiveView Technical Support @ 888-588-9408 Opt 2.



STEP 1

Place the dangling propane hoses on the outside of the propane enclosure as shown.

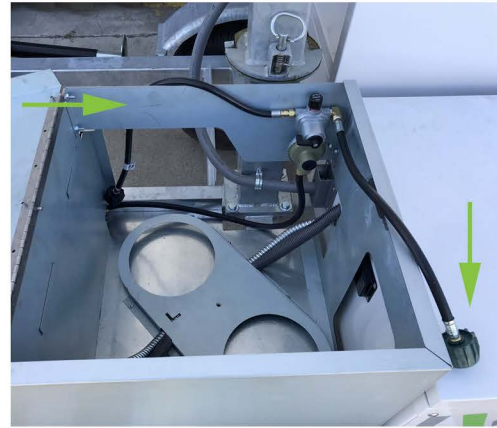

STEP 2

Gently place the first propane tank in the left position (lower it into place at an angle in order to seat it properly.) Gently place the second tank in the remaining right position.



STEP 3

Rotate the right tank so that the valve is facing towards the changeover valve. Install the propane hose on the right tank as shown.



STEP 4

Rotate the left tank so that the opening on the valve is facing the changeover valve. Twist the left propane hose so that there is one coil in it as shown, then securely attach left hose.



STEP 5

Rotate the tanks slightly so that the openings in each handle are facing towards each other as shown. Make sure hoses are not kinked or pinched.



STEP 6

Place the tank clamp "V" as shown, so that it rests on the handles of both tanks.



STEP 7

Insert the clamp wingnut rod as shown. Thread rod into the base of the tanks and tighten until the tanks are held snugly in place.




STEP 8

After completing steps 1-7, open both propane tank valves.



STEP 9

To check if tank is empty, turn the change-over valve lever toward propane tank as shown. If it is green, tank is full. If it is red, tank is empty and will need to be replaced.

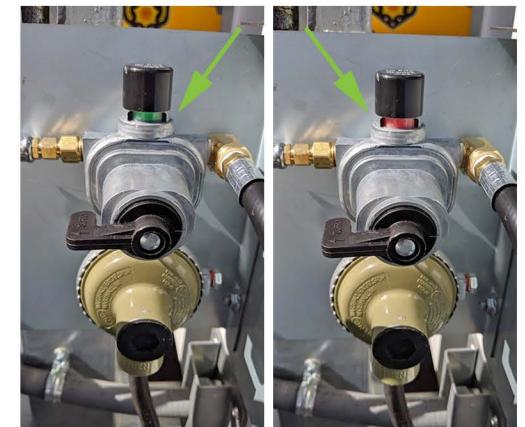

STEP 10

If both propane tanks are empty, power cycle the switch located in battery box as shown to reset the generator controller. Manually start the generator by pushing and holding the two green "Start" buttons until the generator starts.

